

IMPORTANT

CENTERFORCE FLYWHEELS

ALL FLYWHEELS

All CENTERFORCE flywheels have a preservative on them to help prevent rust. We recommend that you use BRAKE CLEAN to remove all traces of the preservative prior to installing the clutch assembly.

Failure to do so may cause slippage and premature clutch failure

NOTE: Replacement of any Dual-Mass flywheel with a Single-Mass Flywheel may result in unwanted gear noise from the transmission.



CENTERFORCE
DUAL FRICTION



DYAD
QUALITY ENGINEERED MULTI DISC CLUTCH SYSTEMS



LMC
SERIES



"NOTE" Centerforce tip sheets are for general reference only. Please refer to your owners manual for vehicle specifications.

IMPORTANT

IMPORTANT



Customers requiring
24-month SFI activation.



Thank you for purchasing clutch components certified by Centerforce to SFI Specification 1.1. Some competition sanctioning bodies require clutch components to be SFI certified every 24 months. The enclosed clutch component(s) contain the official SFI decal and corresponding serial number etched into the part. Please note that the component SFI ACTIVATION DATE is also etched near the SFI serial number. SFI 24-month certification STARTS from this SFI ACTIVATION DATE. Centerforce clutch components have an indefinite shelf life, however, due to the chain of commerce, the enclosed components may arrive to customers beyond this initial SFI ACTIVATION DATE. If you need full 24 months SFI certification to conform to competition rules, Centerforce can issue a new SFI serial number and SFI ACTIVATION DATE free of charge. To request a fresh SFI ACTIVATION DATE from Centerforce, you MUST contact Centerforce prior to installation and supply a copy of your proof of purchase. This request MUST be submitted within 30 days of purchase. If you require this service, please completely fill out the enclosed SFI activation form and return to Centerforce with a copy of your proof of purchase. Forms and receipts can be sent via Mail, Fax, or Email. If needed, SFI activation forms can also be obtained from our website: www.centerforce.com. Should you have questions or if you require further information please contact Centerforce customer service at (800) 932-5882. Information specifically about SFI certification can be found at www.sfifoundation.com (Reference SFI Clutch/Flywheel Specification 1.1).

IMPORTANT! This activation service is ONLY applicable to new components within 30 days of purchase. Centerforce components that have been SFI certified and used in competition MAY be eligible for re-certification but ONLY after the component(s) have been returned to Centerforce for inspection. Please obtain a Return Merchandise Authorization (RMA) number for inspection and re-certifications. Fee for this service may vary.

If you are NOT competing under specific sanctioning body rules, then the SFI activation date is not relevant to your application or your vehicle use. In this case feel free to use your Centerforce product regardless of the SFI activation date.

Ph: (800) 932-5882
Fax: (928) 771-8322
Email: sales@centerforce.com

Centerforce Clutches
2266 Crosswind Dr.
Prescott, AZ 86301

Email Address: _____

Full Name: _____

Date Purchased: _____

Street Address: _____

Part #: _____

City: _____

Current SFI #: _____

State: _____

Note: A copy of your receipt/proof of purchase is required to obtain an updated SFI Activation Date and SFI Number.

Zip: _____

Country: _____


Phone: _____

Please do not write below this line, completed by Centerforce!

New SFI #: _____

Date Certified: _____

Certified By: _____



Keep this for your records once the SFI Label is affixed.

IMPORTANT

Centerforce Ford Flywheels With Bolt on Counterbalance

THIS CENTERFORCE FLYWHEEL IS ZERO (INTERNAL) BALANCED. INCLUDED ARE 2 WEIGHTS AND 3 SCREWS IF YOUR ENGINE REQUIRES A COUNTERBALANCE. THE WEIGHT WITH 2 HOLES (FIGURE-1) IS FOR ENGINES REQUIRING A 28 IN/OZ COUNTERBALANCE. THE WEIGHT WITH 3 HOLES (FIGURE-2) IS FOR ENGINES REQUIRING A 50IN/OZ COUNTERBALANCE. THE 5/16" SCREWS (FIGURE-3) ARE TO BE TORQUED TO 25 FT/LBS USING A SMALL AMOUNT OF RED THRED LOCKING CMPOUND. ALL 3 SCREWS ARE USED WITH THE 50 IN/OZ WEIGHT. 2 SCREWS ARE USED WITH THE 28 IN/OZ WEIGHT. ATTACH THE CORRECT BALANCE WEIGHT TO THE BACKSIDE OF THE FLYWHEEL (FIGURE-4) FOR YOUR SPECIFIC ENGINE REQUIREMENTS.

FIGURE 1:




FIGURE 2:



FIGURE 3:



FIGURE 4:

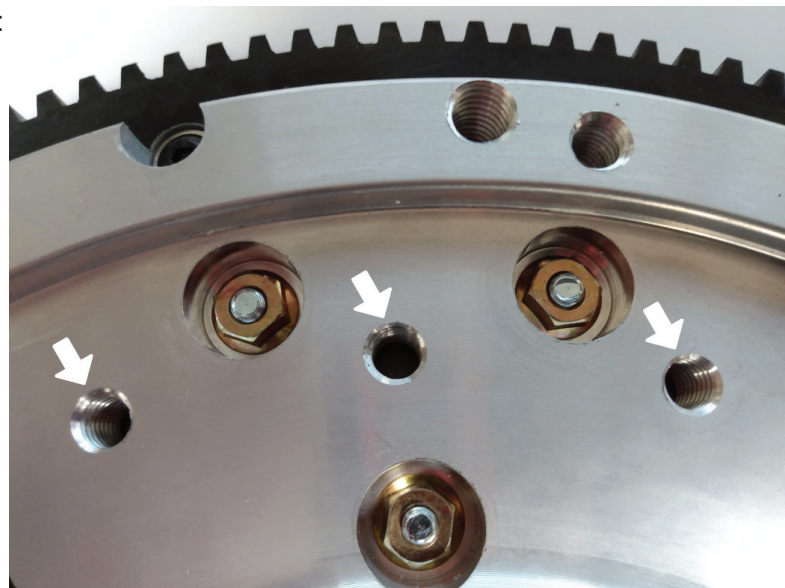

**CENTERFORCE
FLYWHEELS**

